


JM Series Oil-less Compressor

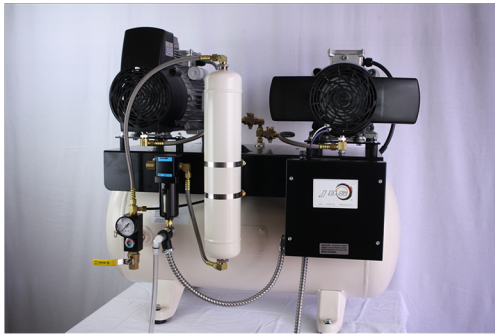

JM Series Oil-less Compressor Specifications

Model	JM111	JM121	JM122	JM223	JM224
Total HP	1	1	2	3	4
User Capacity	1 ~ 2	1 ~ 2	2 ~ 3	3 ~ 4	4 ~ 5
Voltage (AC)	120	230	230	230	230
Line Frequency	60	60	60	60	60
Max Amps	14	7	15	22	30
Breaker Size	20	20	20	30	40
CFM @ 80 psi	4.9	4.9	9.8	14.7	19.6
# of Motors	1	1	1	2	2
dBA	72	72	72	73	73
Tank Capacity	12	12	12	20	30
Size (H * W * D)	29 * 28 * 23	29 * 28 * 23	29 * 28 * 23	31 * 34 * 26	33 * 39 * 26
Temperature Range	40F- 104F	40F- 104F	40F- 104F	40F- 104F	40F- 104F
Shipping Weight (lbs)	190	190	200	300	330

JM Series features:

- All new motor design to reduce noise and improve reliability.
- New intake filter design, wall mount air intake filter no longer necessary. Filters are located on the motors directly.
- Coalescing filter to filter out contaminants from air supply.
- Desiccant air dryer to remove moisture from the compressed air.
- Purge tank to remove residual humidity in the compressor after each cycle.
- 5 years warranty on motors, 3 years warranty on rest of compressor. See website for details.

